



HYDROMATIC®

HPUSP125

Utility Sink Pump

Perfect for basement wet bars, laundry and utility sinks.

- Fully Automatic Operation
- Complete Compact System
- Designed To Be Used with a Sink Where Gravity Drain Line Is Not Available
- Up to 31 GPM with 13' Head
- Easy to Install
Eliminates the Need for Traps, Vents and Costly Labor
- Quiet, Trouble-Free Operation
Easily Mounts Beneath Your Sink



Pentair
Water™

HPUSP125 – Utility Sink Pump

Details

Specifications

- Housing – thermoplastic
- Power Cord – 8' grounded three-prong, type SJTW
- Liquid Temperature – 32–120°F (0–50°C)
- Motor – 1/8 HP
- Electrical – 115V, 2.8 amps, 1-phase, 60 Hz

Parts Included

- Pump Assembly
- Fiber Gasket and O-Ring
- 1" NPT to Slip (Glued) Outlet Adapter
- One-way Valve (Check Valve)
- Discharge Shut-off/Flow Balancing Valve
- Strainer Cup
- 90-Degree Elbow

Ordering Information


Catalog Number	HP	Voltage	Amps	Phase	Hz	Cord Length	Approx. Wt. Lbs.
HPUSP125	1/8	115	2.8	1	60	8'	15

Pump Performance

Catalog Number	Gallons Per Minute at Discharge Head in Feet				
	0'	3'	5'	7'	10'
HPUSP125	31	29	27	24	20

In order to provide the best products possible, specifications are subject to change.

Pump Installation

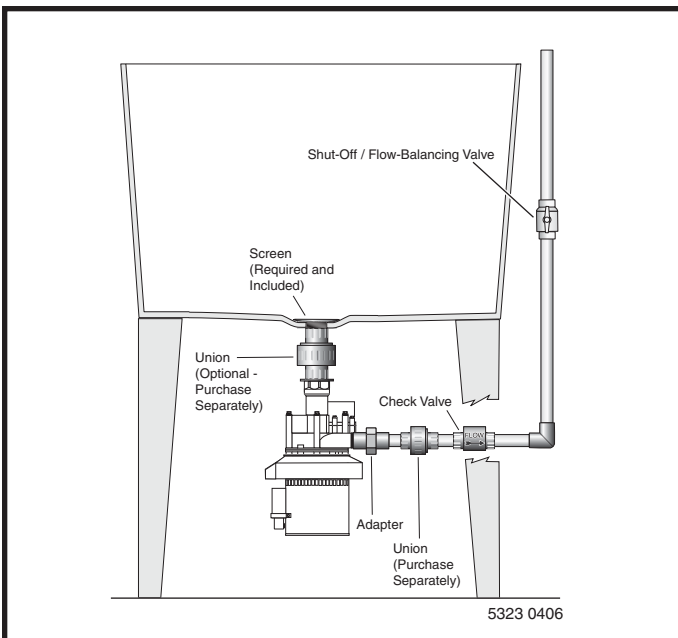

– Your Authorized Local Distributor –



USA

740 East 9th Street, Ashland, Ohio 44805
Tel: 419-289-3042 Fax: 419-281-4087

www.hydomatic.com

CANADA

269 Trillium Drive, Kitchener, Ontario, Canada N2G 4W5
Tel: 519-896-2163 Fax: 519-896-6337